

# SHARKSKIN Ultra SA®

**The Ultimate Roof Underlayment**

## SHARKSKIN ULTRA SA® 5SQ. ROLL Instructions and Information

SHARKSKIN ULTRA SA® - ALL WEATHER BARRIER™  
Use: Under tile, metal, slate and asphalt shingle roof systems.




**Roll size:** 48"x 125' approx. Roll weight: 65 lbs. approx.

**Coverage:** approx. 470 sq. ft. per roll or less depending upon overlap and roof design.

**Installation:** SHARKSKIN ULTRA SA® roofing underlayment should generally be installed above ventilated attic spaces. SHARKSKIN ULTRA SA® is considered a vapor barrier, check with local building codes. **Preparation:** The deck surface must be dry and free of dust, dirt, loose nails, debris and other protrusions. **Damaged sheathing must be replaced.** SHARKSKIN ULTRA SA® is installed by positioning the underlayment, then pulling away the split-release liner film backing and applying the underlayment directly to the roof deck horizontally parallel to the eave of the roof with the printed side up. **Use Caution when working with the adhesive side of the underlayment so as to not let it stick to itself or other surfaces prior to installation.** Overlaps run with the flow of water in a shingling manner. Overlap: a minimum 2-inch (4-inch is recommended) for horizontal laps and a minimum 6-inch for vertical laps. Use straight blade utility knife or scissors to cut. **For adhesive foam set tile systems:** SHARKSKIN ULTRA SA® is additionally nailed to the roof deck with 1-inch diameter corrosion resistant metal round caps nails, a minimum of 1" below and 12" O.C. along the top horizontal edge of the underlayment. Broom in the entire surface of the underlayment and use a heavy roller on all seams/laps to maintain a secure bond. Roof pitches 6:12 & above, must install batten systems. SHARKSKIN ULTRA SA® has a maximum 12 month exposure rating.

Go to [www.sharkskin.us](http://www.sharkskin.us) or contact Kirsch Building Products for approved substrates.

**BE CAREFUL TO OBSERVE SAFE ROOFING CODES & PRACTICES (OSHA). USE CAUTION WHEN WALKING OR STANDING ON SHARKSKIN ULTRA SA®. COEFFICIENT OF FRICTION MAY CHANGE WITH WET, DUSTY OR ICY CONDITIONS. FAILURE TO USE PROPER SAFETY GEAR AND FOOTWEAR CAN RESULT IN SERIOUS INJURY.**

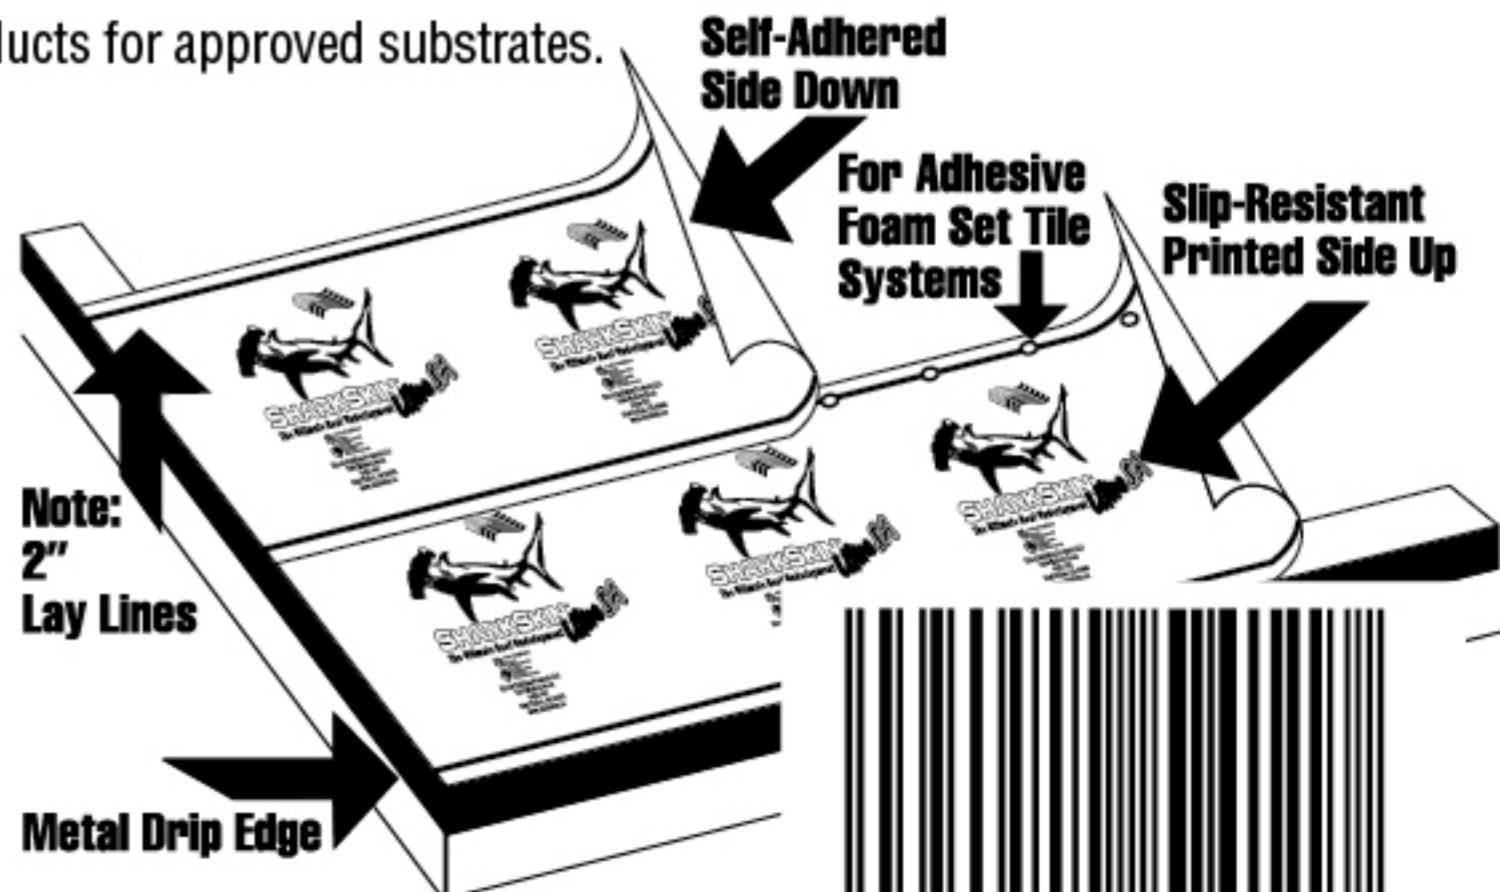

Florida Building Code



ESR-1708  
ICC-ES AC188  
ICC-ES AC48  
EXCEEDS ASTM D226

U.S. Patent #8,765,251

U.S. Patent #6,308,482

Kirsch Building Products LLC  
1464 Madera Road, #N Suite 387  
Simi Valley, CA 93065  
[www.sharkskinroof.com](http://www.sharkskinroof.com)  
1-877-742-7507

MIAMI-DADE COUNTY  
APPROVED

TEXAS DEPARTMENT OF INSURANCE

