SHARKSKIN'



All construction professionals know the importance of a quality roof system. That is why so much research, time and effort goes into specifying and installing the right roofing product for every building.

The SHARKSKIN ULTRA RADIANT® is designed to reduce energy costs by reducing attic temperatures, as well as being engineered to exceed industry standards for long term moisture protection as part of the SHARK-SKIN™ family of patented state-of-the-art roof underlayments.

Thermally stable within the roof system while reflecting Ultra Violet rays away from the attic structure.

These days you can't afford not to install cost effective energy saving roofing components that also reduce the potential liability of using inferior tar paper roofing felts. Give your customers a cost effective, long term, energy saving roof system by starting with "The Ultimate Roof Underlayment" specify Specify Sharkskin Ultra Radiant™



Developed to exceed 2008 California Energy Code requirements and Industry Standards for long term moisture protection!

Code Compliance

- ICC-ES AC188, AC48 & ICBO AC08*
- ESR Report 1708
- BOCA
- SBCCI
- Florida Building Code FL#8087 R-4
- Miami/Dade HVHZ NOA 15-0421.10
- Exceeds ASTM D226
 Per tile roof installation instructions www.sharkskin.us / roll labels

Kirsch Building Products LLC

Tel: (805) 750-0084 Fax: (805) 526-1116


email: kirsch@sharkskin.us

www.sharkskin.us

1464 Madera Road Suite 387 Simi Valley, CA 93065

Patent # 6,308,482 American Owned and Operated 100% Recyclable 101-12004



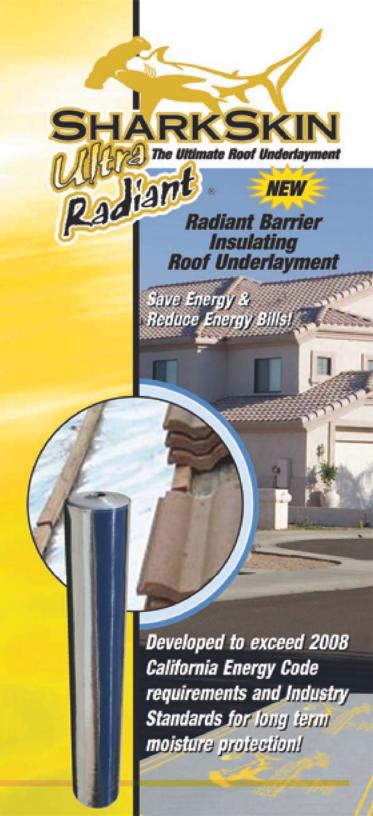

Benefits

Smart Investment

Long term moisture protection and reduced energy bills

Patented, State-of-the-Art

Energy Saving Radiant Barrier Insulating Underlayment

Helps to Reduce Attic Temperature

Reducing cooling cost

Installs with 3/8" Roofing Nails

Does not require plastic caps

Nail Sealability

Provides long term nail sealabilty per ICC-ES AC48.

High Tensile Strength

Provides a secondary water barrier if primary roof is blown off

Slip-Resistant

Even in wet or dusty conditions

Light Weight

Easy to lift, load, and work with 48" x 250" rolls - 10 SQS 55 lbs. per roll approx.

12 Month UV Exposure Rating

Will Not Rot

Will not rot, dry out or become brittle.

Will Not Scar or Melt

NO Sticky Mess Withstands high temperatures

Visit Our Website! www.sharkskin.us







Radiant Barrier Insulating Roof Underlayment