

MS1® MECHANICALLY SEAMED STANDING SEAM

METAL ROOF PANELS

Double Lock or Single Lock Mechanically Seamed Panels Available Materials: Aluminum, Copper Available Finishes: Galvalume®/Zincalume®, Galvanized, PVDF, SMP Painted

SPECIFICATIONS:

Mechanically Seamed Metal Roofing Panel **Profile Type:** With Clips And Concealed Fasteners

Rib Height:

Overall Width

Standard: 12", 14", 16", 18" **Custom Widths Available:** 12"-24" Warranty: 40 year limited*

Available Gauges

Standard: 22, 24 Custom: 26, 24, 22

Substrate: AZ 50 Minimum (Galvalume®/Zincalume®) Cool Tech® 500 - PVDF Finish: **Fasteners:** Concealed **Panel Length Factory:** 1' to 52'

Onsite Roll Forming Panel Length: 1' - Custom* *Please contact WSMR for Onsite Roll Forming Details.

Recommended Minimum Roof Slope:

1/12

Installation: Installation over a solid substrate with an

underlayment between the panel and

the substrate.

Additional Product Options:

- Striations
- · Stiffening Ribs/Beads

TESTING AND APPROVALS:


For the complete list, please contact your sales representative

- ASTM A653 G90 Galvanized
- ASTM A792 Zincalume/Galvalume AZ-50/55
- ASTM B209 Aluminum Substrate

APPLIES TO THE FOLLOWING COLORS/FINISHES:

- Almond
- Ash Gray
- · Bone White
- Burnished Slate
- Champagnet
- Charcoal Gray Classic Green
- Colonial Red
- Dark Bronze
- Desert Tan
- Dolphin Gray
- Dove Gray
- Gun Metal Gray
- Mansard Brown
- Matte Black
- Matte Midnight Black
- Medium Bronze
- Copper Penny† • Regal Blue
- · Regal Red • Regal White
- Royal Blue Sandstone
- Silver Metallic†
- Slate Blue
- Slate Gray Terra Cotta
- Zinc Metallic®†
- † This material is batch sensitive and directional. Do not mix batches or coil lots.

PROFILE:

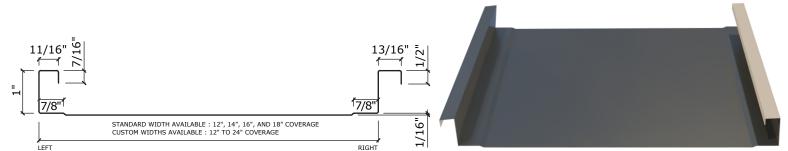

Shown in Gun Metal Gray

Colors represented on this profile sheet may not match actual material. All colors should be verified using an actual metal color sample.

Rev. 11.18.25

^{*}Limited warranty. Please review prior to purchase.