

7/8" CORRUGATED

7/8" Corrugated

7/8" Corrugated Metal Roofing & Wall Panels Have Deep Wavy Corrugations. Available Materials: Aluminum, Copper, Corten/A606-4, Steel Available Finishes: Bare Steel, Galvalume®/Zincalume®, Galvanized, Kynar®/PVDF, SMP Painted

SPECIFICATIONS:

Profile Type:

Installation:

Rib Height: 7/8" **Rib Distance (Pitch):** 2.67" Pitch **Overall Width:** 39" Coil Feed: 48" Warranty: Sold AS IS - No Warranty **Coverage Area Roof:** 34.67" Wall: 37" **Available Gauges:** 22, 20 Substrate: A606-4 (AKA Corten®) Finish: A606-4 (AKA Corten®) **Fasteners: Exposed Panel Length:** 1' to 52'

> Can be installed over an open purlin system or a solid substrate. Use bead mastic on the overlap if used for a roofing application.

Recommended Minimum Roof Slope:

TESTING AND APPROVALS:

- UL 2218A Impact Resistance Class 4
- UL 790 Fire Resistance Rating Class A, per building code

APPLIES TO THE FOLLOWING COLORS/FINISHES:

· A606-4 (AKA Corten®)

***Material does not arrive pre-rusted. Panel will rust naturally with exposure to the weather. Use stainless steel screws with a painted brown screw head for installing the panels.




3/12

Shown in A606-4 (AKA Corten®)

PROFILE:

7/8" Corrugated

39" Out-To-Out

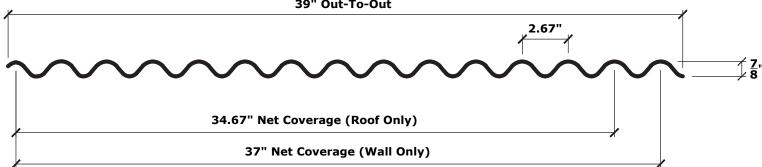

***There can be variance in the overall width of up to 1". This will NOT lessen roof/wall coverage.

Colors represented on this profile sheet may not match actual material. All colors should be verified using an actual metal color sample.